


HD Camera C25

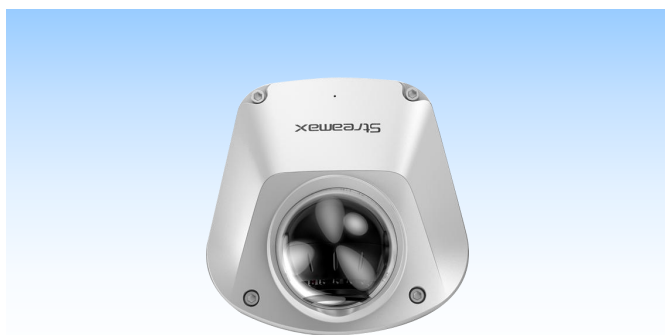

Main Features

- ◆ 1920x1080 resolution
- ◆ Supports WDR, white balance, gain control
- ◆ Image is easy to store and deal with
- ◆ IP66(Without audio), IP65(With audio)
- ◆ Compact size; light weight
- ◆ Anti-vibration; vandal resistant

Overview

Streamax C25 is an intelligent IPC with compact size and light weight. It automatically controls shutter speed, white balance, contrast, brightness, saturation and other parameters, which has excellent performance in color reproduction. C25 offers a reliable HD surveillance solution for various vehicles.

Specification

Product series	C25
Sensor	2 MP 1/2.9" CMOS
Resolution	1920(H)x1080(V)
Minimum Illumination	0.1Lux(Color Illumination), F1.2
Electronic Shutter	1/30 Second -1/10000 Second
Wide Dynamic Range	≥80db
Black-light Compensation	Support
S/N	≥45db
IR	5-8m
Lens	2.6mm,2.8mm, 4mm, M12 Fixed aperture F1.8
FOV	2.6mm=H*V 108*61°/2.8mm=H*V 96*55°/4mm= H*V 73*41°
Video Compression Standard	H.264
Compression Output Rate	512Kbps-8Mbps
Image Resolution	Main Stream:1080P(720P) @ 30fps, Sub Stream1:VGA/WD1/D1/QVGA/CIF @30FPS Net transmission stream: dynamic (adjustable)
CBR/VBR	Support
Audio Compression Standard	ADPCM, G.711A, G.711U, G.726
Network port	10M/100M adaptive Ethernet port
Network Protocol	TCP/IP, HTTP, DHCP, RTSP, NTP, FTP
ONVIF	Support
Client Preview	Built-in WEB server; Support IE browser
Installation features	Installs on the roof or wall of the vehicle
Temperature	-40°C + 70°C
Humidity	0% - 90%
Power Supply	DC 12V/POE

Waterproof Class	IP66(Without audio),IP65(With audio)
Power Consumption	<2w(day) < 3.5w(night)
Dimension (mm)	101.5mm(L)*96mm(W)*52.6mm(H)

Dimension (Unit: mm)